



Airmi Split heat pump

AISB140X3o^[R14] / AIS140X13i^[R14]

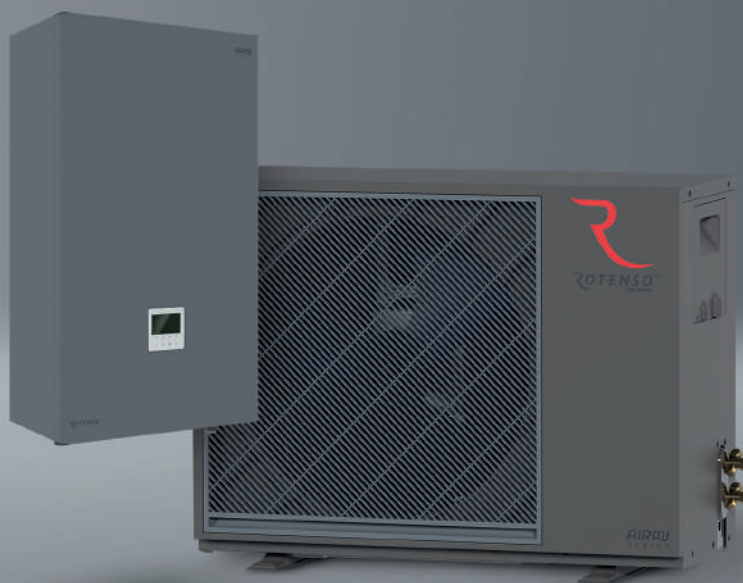

Device features

Environmentally friendly refrigerant R32	Efficient heating	Energy efficiency class at 35°C A+++	Energy efficiency class at 55°C A++	Maximum COP 4,61	Operating range down to -25°C	Supply water temperature of 65°C	Smart Grid functionality
Twin rotary compressor	Integrated electric heater	Outdoor unit drip tray heater	Compressor crankcase heater	Indoor unit drip tray	Easy installation and maintenance	Compact indoor split unit housing	Maximum installation length up to 15m
Silent mode	Integrated Wi-Fi module	Daily operation schedule	Configurable weekly schedules	Vacation mode	Menu in English	Multilanguage menu	Integrated temperature sensor
Weather operating modes (climate curve)	2 heating control zones	Dedicated application	Disinfection	Maximum leaving water temperature of 60°C (in DHW mode)	Prepared to create a cascade system	Modbus Protocol	

Specification indoor unit

Model				AIS140X13i R14	
EAN Code				5905567602870	
Operation modes				Heating and cooling	
Leaving water temperature	Space cooling	°C		7-25	
	Space heating	°C		25-65	
	DHW (tank)	°C		25-60	
Power supply		V-Hz, Ø		220-240-50, 1f / 380-415-50, 3f	
Rated input		W		9090	
Operating current		A		13,9	
Sound power level		dB		42	
Electric heater	Power supply	V-Hz, Ø		220-240-50, 1f / 380-415-50, 3f	
	Number of heating stages	pcs		3	
	Power	kW		9	
	Maximum operating current	A		13,6	
Net dimensions		(W x D x H)	mm	465 x 273 x 909	
Gross dimensions		(W x D x H)	mm	525 x 345 x 960	
Net weight / Gross weight			kg	44 / 49	
Water circuit	Water connections		mm (inch)	Ø33 (1,30)	
	Pressure relief valve		MPa	0,5	
	Condensate drain		mm	Ø12,7	
	Expansion tank	Total volume	l	5	
		Actual volume	l	2	
		Maximum pressure	MPa	0,5	
		Initial pressure	MPa	0,15	
	Heat exchanger	Type	PHE / plate heat exchanger		
		Minimum flow	l/min	10	
	Water pump head		m	9	
	Water pump type		DC inverter		
Refrigerant circuit	Liquid / Gas		mm	Ø9,52 / Ø15,88	
Power cables: indoor unit			pcs x mm²	5 x 4	
Control cables: indoor unit to outdoor unit			pcs x mm²	2 x 0,75 (shielded cable)	

Specification outdoor unit

Model				AISB140X3o R14	
EAN Code				5905567602665	
Power supply			V-Hz, Ø	380-420-50, 3f	
Heating (A7/W35)	Capacity		kW	14,30	
	Rated input		kW	3,10	
	COP			4,61	
Heating (A7/W45)	Capacity		kW	14,50	
	Rated input		kW	3,89	
	COP			3,72	
Heating (A7/W55)	Capacity		kW	14,10	
	Rated input		kW	4,52	
	COP			3,12	
Cooling (A35/W18)	Capacity		kW	13,50	
	Rated input		kW	3,75	
	EER			3,65	
Cooling (A35/W7)	Capacity		kW	12,70	
	Rated input		kW	4,98	
	EER			2,55	
Seasonal energy efficiency LWT at 35°C	SCOP ⁽¹⁾			4,98	
	Rated heat output		kW	13,2	
	Seasonal energy efficiency ratio (η _S)		%	196	
	Annual energy consumption		kWh	5470	
	Seasonal space heating energy efficiency class ⁽¹⁾			A+++	
Seasonal energy efficiency LWT at 55°C	SCOP ⁽¹⁾			3,49	
	Rated heat output		kW	13,0	
	Seasonal energy efficiency ratio (η _S)		%	136	
	Annual energy consumption		kWh	7687	
	Seasonal space heating energy efficiency class ⁽¹⁾			A++	
SEER	LWT at 7°C			5,39	
	LWT at 18°C			7,71	
Maximum overcurrent protection (MOP)			A	16	
Minimum circuit amps (MCA)			A	11	
Compressor		Type	Twin rotary inverter compressor DC		
Fan	Type		Brushless DC motor / BLDC		
	Quantity		1		
Refrigerant	Type		R32		
	GWP		675		
	Quantity	kg	1,84		
		TCO _{eq}	1,242		
Pipe connections	Liquid / Gas		mm	Ø9,52 / Ø15,88	
	Minimum installation length		m	3	
	Maximum installation length		m	15	
	Additional amount of refrigerant for over 7.5 linear meters		g/m	38	
Maximum height difference	Outdoor unit above the indoor unit		m	8	
	Outdoor unit below the indoor unit		m	8	
Power cables: outdoor unit			pcs × mm ²	5 × 4	
Control cables: indoor unit to outdoor unit			pcs × mm ²	2 × 0,75 (shielded cable)	
Bracket spacing		(W1 × D)	mm	654 × 493	
Sound pressure level			dB(A)	50	
Sound power level			dB(A)	65	
Net dimensions		(W × D × H)	mm	1099 × 436 × 854	
Gross dimensions		(W × D × H)	mm	1165 × 495 × 1040	
Net weight / Gross weight			kg	108 / 123	
Operating outdoor temperature	Cooling/ Heating		°C	-5-43 / -25-35	
	DHW		°C	-25-43	


(1) Seasonal energy efficiency class measured under average climate conditions.

Notes: DHW - Domestic hot water, LWT - Leaving water temperature

The sound pressure level is measured 1m in front of the unit and (1+H)2m (where H is the height of the unit) above the floor in semi-anechoic room. During on-site operation sound pressure levels can be higher as a result of ambient noise. Sound pressure level and sound power level reflect the maximum value tested under three conditions specified respectively in notes A7W35, ΔT=5; A7W45, ΔT=5; A7W55 ΔT=8; relative humidity 85%. The figures specified above refer to the following standards: EN14511; EN14825; EN50564; EN12102; (EU) Np. 811/2013; (EU) No. 813/2013; Journal of Laws 2014 / C 207/02: 2014.

Airmi Split heat pump

AISG140X3o^[R14] / AIS140X13i^[R14]



Device features

Environmentally friendly refrigerant R32	Efficient heating	Energy efficiency class at 35°C A+++	Energy efficiency class at 55°C A++	Maximum COP 4,61	Operating range down to -25°C	Supply water temperature of 65°C	Smart Grid functionality
Twin rotary compressor	Integrated electric heater	Outdoor unit drip tray heater	Compressor crankcase heater	Indoor unit drip tray	Easy installation and maintenance	Compact indoor split unit housing	Maximum installation length up to 15m
Silent mode	Integrated Wi-Fi module	Daily operation schedule	Configurable weekly schedules	Vacation mode	Menu in English	Multilanguage menu	Integrated temperature sensor
Weather operating modes (climate curve)	2 heating control zones	Dedicated application	Disinfection	Maximum leaving water temperature of 60°C (in DHW mode)	Prepared to create a cascade system	Modbus Protocol	

Specification indoor unit

Model				AIS140X13i R14	
EAN Code				5905567602870	
Operation modes				Heating and cooling	
Leaving water temperature	Space cooling	°C		7-25	
	Space heating	°C		25-65	
	DHW (tank)	°C		25-60	
Power supply		V-Hz, Ø		220-240-50, 1f / 380-415-50, 3f	
Rated input		W		9090	
Operating current		A		13,9	
Sound power level		dB		42	
Electric heater	Power supply	V-Hz, Ø		220-240-50, 1f / 380-415-50, 3f	
	Number of heating stages	pcs		3	
	Power	kW		9	
	Maximum operating current	A		13,6	
Net dimensions		(W x D x H)	mm	465 x 273 x 909	
Gross dimensions		(W x D x H)	mm	525 x 345 x 960	
Net weight / Gross weight			kg	44 / 49	
Water circuit	Water connections		mm (inch)	Ø33 (1,30)	
	Pressure relief valve		MPa	0,5	
	Condensate drain		mm	Ø12,7	
	Expansion tank	Total volume	l	5	
		Actual volume	l	2	
		Maximum pressure	MPa	0,5	
		Initial pressure	MPa	0,15	
	Heat exchanger	Type	PHE / plate heat exchanger		
		Minimum flow	l/min	10	
	Water pump head		m	9	
	Water pump type		DC inverter		
Refrigerant circuit	Liquid / Gas		mm	Ø9,52 / Ø15,88	
Power cables: indoor unit			pcs x mm²	5 x 4	
Control cables: indoor unit to outdoor unit			pcs x mm²	2 x 0,75 (shielded cable)	

Specification outdoor unit

Model				AISG140X3o R14	
EAN Code				5905567602733	
Power supply			V-Hz, Ø	380-420-50, 3f	
Heating (A7/W35)	Capacity		kW	14,30	
	Rated input		kW	3,10	
	COP			4,61	
Heating (A7/W45)	Capacity		kW	14,50	
	Rated input		kW	3,89	
	COP			3,72	
Heating (A7/W55)	Capacity		kW	14,10	
	Rated input		kW	4,52	
	COP			3,12	
Cooling (A35/W18)	Capacity		kW	13,50	
	Rated input		kW	3,75	
	EER			3,65	
Cooling (A35/W7)	Capacity		kW	12,70	
	Rated input		kW	4,98	
	EER			2,55	
Seasonal energy efficiency LWT at 35°C	SCOP ⁽¹⁾			4,98	
	Rated heat output		kW	13,2	
	Seasonal energy efficiency ratio (η _S)		%	196	
	Annual energy consumption		kWh	5470	
	Seasonal space heating energy efficiency class ⁽¹⁾			A+++	
Seasonal energy efficiency LWT at 55°C	SCOP ⁽¹⁾			3,49	
	Rated heat output		kW	13,0	
	Seasonal energy efficiency ratio (η _S)		%	136	
	Annual energy consumption		kWh	7687	
	Seasonal space heating energy efficiency class ⁽¹⁾			A++	
SEER	LWT at 7°C			5,39	
	LWT at 18°C			7,71	
Maximum overcurrent protection (MOP)			A	16	
Minimum circuit amps (MCA)			A	11	
Compressor		Type	Twin rotary inverter compressor DC		
Fan		Type	Brushless DC motor / BLDC		
		Quantity	1		
		Type	R32		
Refrigerant		GWP		675	
		Quantity	kg	1,84	
			TCO _{eq}	1,242	
Pipe connections	Liquid / Gas		mm	Ø9,52 / Ø15,88	
	Minimum installation length		m	3	
	Maximum installation length		m	15	
	Additional amount of refrigerant for over 7.5 linear meters		g/m	38	
Maximum height difference	Outdoor unit above the indoor unit		m	8	
	Outdoor unit below the indoor unit		m	8	
Power cables: outdoor unit			pcs × mm ²	5 × 4	
Control cables: indoor unit to outdoor unit			pcs × mm ²	2 × 0,75 (shielded cable)	
Bracket spacing		(W1 × D)	mm	654 × 493	
Sound pressure level			dB(A)	50	
Sound power level			dB(A)	65	
Net dimensions		(W x D x H)	mm	1099 × 436 × 854	
Gross dimensions		(W x D x H)	mm	1165 × 495 × 1040	
Net weight / Gross weight			kg	108 / 123	
Operating outdoor temperature	Cooling/ Heating		°C	-5-43 / -25-35	
	DHW		°C	-25-43	

(1) Seasonal energy efficiency class measured under average climate conditions.

Notes: DHW - Domestic hot water, LWT - Leaving water temperature

The sound pressure level is measured 1m in front of the unit and (1+H)2m (where H is the height of the unit) above the floor in semi-anechoic room. During on-site operation sound pressure levels can be higher as a result of ambient noise. Sound pressure level and sound power level reflect the maximum value tested under three conditions specified respectively in notes A7W35, ΔT=5; A7W45, ΔT=5; A7W55 ΔT=8; relative humidity 85%. The figures specified above refer to the following standards: EN14511; EN14825; EN50564; EN12102; (EU) Np. 811/2013; (EU) No. 813/2013; Journal of Laws 2014 / C 207/02: 2014.

Airmi Split heat pump

AISW140X3o^[R14] / AIS140X13i^[R14]



Device features

							
Environmentally friendly refrigerant R32	Efficient heating	Energy efficiency class at 35°C A+++	Energy efficiency class at 55°C A++	Maximum COP 4,61	Operating range down to -25°C	Supply water temperature of 65°C	Smart Grid functionality
							
Twin rotary compressor	Integrated electric heater	Outdoor unit drip tray heater	Compressor crankcase heater	Indoor unit drip tray	Easy installation and maintenance	Compact indoor split unit housing	Maximum installation length up to 15m
							
Silent mode	Integrated Wi-Fi module	Daily operation schedule	Configurable weekly schedules	Vacation mode	Menu in English	Multilanguage menu	Integrated temperature sensor
							
Weather operating modes (climate curve)	2 heating control zones	Dedicated application	Disinfection	Maximum leaving water temperature of 60°C (in DHW mode)	Prepared to create a cascade system	Modbus Protocol	

Specification indoor unit

Model				AIS140X13i R14	
EAN Code				5905567602870	
Operation modes				Heating and cooling	
Leaving water temperature	Space cooling	°C		7-25	
	Space heating	°C		25-65	
	DHW (tank)	°C		25-60	
Power supply		V-Hz, Ø		220-240-50, 1f / 380-415-50, 3f	
Rated input		W		9090	
Operating current		A		13,9	
Sound power level		dB		42	
Electric heater	Power supply	V-Hz, Ø		220-240-50, 1f / 380-415-50, 3f	
	Number of heating stages	pcs		3	
	Power	kW		9	
	Maximum operating current	A		13,6	
Net dimensions		(W x D x H)	mm	465 x 273 x 909	
Gross dimensions		(W x D x H)	mm	525 x 345 x 960	
Net weight / Gross weight		kg		44 / 49	
Water circuit	Water connections		mm (inch)	Ø33 (1,30)	
	Pressure relief valve		MPa	0,5	
	Condensate drain		mm	Ø12,7	
	Expansion tank	Total volume	l	5	
		Actual volume	l	2	
		Maximum pressure	MPa	0,5	
		Initial pressure	MPa	0,15	
	Heat exchanger	Type	PHE / plate heat exchanger		
		Minimum flow	l/min	10	
	Water pump head		m		9
Water pump type		DC inverter			
Refrigerant circuit	Liquid / Gas		mm	Ø9,52 / Ø15,88	
Power cables: indoor unit			pcs x mm²	5 x 4	
Control cables: indoor unit to outdoor unit			pcs x mm²	2 x 0,75 (shielded cable)	

Specification outdoor unit

Model				AISW140X3o R14	
EAN Code				5905567602801	
Power supply			V-Hz, Ø	380-420-50, 3f	
Heating (A7/W35)	Capacity		kW	14,30	
	Rated input		kW	3,10	
	COP			4,61	
Heating (A7/W45)	Capacity		kW	14,50	
	Rated input		kW	3,89	
	COP			3,72	
Heating (A7/W55)	Capacity		kW	14,10	
	Rated input		kW	4,52	
	COP			3,12	
Cooling (A35/W18)	Capacity		kW	13,50	
	Rated input		kW	3,75	
	EER			3,65	
Cooling (A35/W7)	Capacity		kW	12,70	
	Rated input		kW	4,98	
	EER			2,55	
Seasonal energy efficiency LWT at 35°C	SCOP ⁽¹⁾			4,98	
	Rated heat output		kW	13,2	
	Seasonal energy efficiency ratio (η _S)		%	196	
	Annual energy consumption		kWh	5470	
	Seasonal space heating energy efficiency class ⁽¹⁾			A+++	
Seasonal energy efficiency LWT at 55°C	SCOP ⁽¹⁾			3,49	
	Rated heat output		kW	13,0	
	Seasonal energy efficiency ratio (η _S)		%	136	
	Annual energy consumption		kWh	7687	
	Seasonal space heating energy efficiency class ⁽¹⁾			A++	
SEER	LWT at 7°C			5,39	
	LWT at 18°C			7,71	
Maximum overcurrent protection (MOP)			A	16	
Minimum circuit amps (MCA)			A	11	
Compressor		Type	Twin rotary inverter compressor DC		
Fan		Type	Brushless DC motor / BLDC		
		Quantity	1		
		Type	R32		
Refrigerant		GWP		675	
		Quantity	kg	1,84	
			TCO _{eq}	1,242	
Pipe connections	Liquid / Gas		mm	Ø9,52 / Ø15,88	
	Minimum installation length		m	3	
	Maximum installation length		m	15	
	Additional amount of refrigerant for over 7.5 linear meters		g/m	38	
Maximum height difference	Outdoor unit above the indoor unit		m	8	
	Outdoor unit below the indoor unit		m	8	
Power cables: outdoor unit			pcs × mm²	5 × 4	
Control cables: indoor unit to outdoor unit			pcs × mm²	2 × 0,75 (shielded cable)	
Bracket spacing		(W1 × D)	mm	654 × 493	
Sound pressure level			dB(A)	50	
Sound power level			dB(A)	65	
Net dimensions		(W × D × H)	mm	1099 × 436 × 854	
Gross dimensions		(W × D × H)	mm	1165 × 495 × 1040	
Net weight / Gross weight			kg	108 / 123	
Operating outdoor temperature	Cooling/ Heating		°C	-5-43 / -25-35	
	DHW		°C	-25-43	

(1) Seasonal energy efficiency class measured under average climate conditions.

Notes: DHW - Domestic hot water, LWT - Leaving water temperature

The sound pressure level is measured 1m in front of the unit and (1+H)2m (where H is the height of the unit) above the floor in semi-anechoic room. During on-site operation sound pressure levels can be higher as a result of ambient noise. Sound pressure level and sound power level reflect the maximum value tested under three conditions specified respectively in notes A7W35, ΔT=5; A7W45, ΔT=5; A7W55 ΔT=8; relative humidity 85%. The figures specified above refer to the following standards: EN14511; EN14825; EN50564; EN12102; (EU) Np. 811/2013; (EU) No. 813/2013; Journal of Laws 2014 / C 207/02: 2014.